



Cordless Impact Wrench

Perengkuh Impak Tanpa Kord 充电式冲击套筒扳手

DTW700 | DTW701 12.7 mm (1/2")

High Torque and Compact

Tork tinggi dan reka bentuk yang padat 高扭矩 紧凑的设计



18V Lithium-ion
18V 锂离子



Teknologi Ekstrim Litium-ion
锂离子技术



Motor tanpa berus
无碳刷马达



EXTREME PROTECTION TECHNOLOGY
Teknologi Perlindungan Ekstrim
防尘防水滴技术



PRODUCT
DETAILS
Models and specs
may vary by country



PRODUCT
DETAILS
Models and specs
may vary by country



Max Fastening Torque

Tenaga Pemutaran Pengancing Maksimum 最大紧固扭力

700 N·m

Actual measured value at
6 seconds after seating



DTW700
C ring



DTW701
Pin detent





Twin LED job light
with preglow and afterglow functions
Lampu kerja LED kembar
dengan fungsi preglow dan afterglow
具有预发光和余辉功能的双LED工作灯

Variable speed control by trigger
Pemicu kawalan kelajuan
板机变速控制

Hook
Cangkuk
挂钩




Compact design with a short overall length

Reka bentuk yang padat dengan panjang keseluruhan yang pendek
紧凑的设计



Proper fastening torque curve

Pengetatan tork yang betul 正确的紧固扭矩

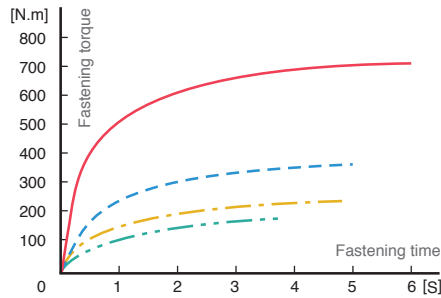

Max mode (4)
High strength friction grip bolt M24

Hard mode (3)
High strength friction grip bolt M16

Medium mode (2)
High strength bolt M16

Soft mode (1)
High strength bolt M14

Accessories (Optional)

Aksesori pilihan 可附加选购配件

Extension handle set

Set pemegang sambungan
延长手柄

Part No. 191G67-2





Electronic 4 stage impact power selection

Both in forward and reverse rotation modes, max/ hard/ medium/ soft impact power can be selected to suit the material of workpiece or screw type simply by pushing a button

Pemilihan daya impak 4 peringkat elektronik — Dalam mod putaran ke depan dan bertentangan, hanya dengan menekan butang, daya impak maksimum/ kuat/ sederhana/ lemah dapat dipilih agar sesuai dengan bahan benda kerja atau jenis skru

电子4级冲击功率选择 — 在正向和反向旋转模式下, 只需按一下按钮即可选择最强/强/中/弱的冲击力以适合工件或螺丝类型

Pushing a button Tekan butang 按下按钮



No load speed (min ⁻¹)	Impacts per minutes (min ⁻¹)
Max: 0-2,200	Max: 0-2,700
Hard: 0-1,900	Hard: 0-2,400
Medium: 0-1,200	Medium: 0-1,700
Soft: 0-500	Soft: 0-1,000

Trigger switch with full speed mode

- Variable speed mode can be changed to full speed mode simply by pushing a button.
- Because in full speed mode, the trigger travel is shorter than in variable speed mode, the full speed is quickly reached, reducing hand and finger fatigue from trigger pull.

Kawalan kelajuan dengan pemicu — Mod kelajuan boleh berubah dengan menekan butang, mod penuh dapat dicapai dengan cepat mengurangkan keletihan tangan dan jari semasa pemicu ditarik

通过开关板机进行变速控制 — 按下按钮即可更换速度模式, 快速达到全速模式, 从而减少了扳机拉动时手和手指的疲劳

Auto-stop system available both in forward/reverse rotation modes

3 modes of reaction time for automatic stop available both in forward and reverse rotation modes.

3 mod reaksi berhenti automatik dapat digunakan dalam mod putaran ke depan dan bertentangan

3种自动停止的反应模式可在正向和反向旋转模式下使用

	Forward	Reverse
mode 1	The tool stops automatically as soon as it has detected the first impact blow.	The tool stops automatically as soon as it has stopped impact blow.
mode 2	The tool stops automatically approximately 0.5 seconds after the moment it has detected the first impact blow.	The tool stops automatically approximately 0.3 seconds after the moment it has stopped impact blow.
mode 3	The tool stops automatically approximately 1.0 second after the moment it has detected the first impact blow.	The tool automatically slows down to 230min ⁻¹ after the moment it has stopped impact blow.

DTW700RTJ | DTW700Z DTW701RTJ | DTW701Z

Li-ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

Fastening Capacities Kapasiiti 能力	Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
--------------------------------------	--

Square Drive Kepala Segi Empat 方形头	12.7mm (1/2")
---------------------------------------	---------------


No Load Speed (RPM) Kelajuan Tanpa Beban 回转数	Max: 0 - 2,200 Hard: 1,900 Medium: 1,200 Soft: 500
---	--

Impacts Per Minute (IPM) Impak Per Minit 冲击数	Max: 0 - 2,700 Hard: 2,400 Medium: 1,700 Soft: 1,000
---	--

Max Fastening Torque Pemutaran Tenaga Maksimum 最大扭矩	700N·m (520ft.lbs.)
--	---------------------

Dimensions (L x W x H) Dimensi 体积	170x81x276mm (6-11/16x3-3/16x10-7/8")
--------------------------------------	---------------------------------------

Net Weight Berat Bersih 净重	2.3 - 2.7kg (5.1 - 6.0lbs.)
-------------------------------	-----------------------------



Standard Equipment Aksesori standard 标准附件
Hook

Available Options Pilihan 选项
DTW700RTJ/ DTW701RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box
DTW700Z/ DTW701Z: Without Charger, Battery & Carrying Case

Like us on Facebook
MAKITA MALAYSIA

* Continuous Usage Time/Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only. In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail. Masa Penggunaan Berterusan/ Jumlah Kerja: Prestasi sebenar mungkin berbeza mengikut aplikasi. Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunakan. 连续使用时间/工作量: 实际表现可能因应用情况而异。规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考, 如果内容有任何差异或不一致, 概以英文版本为准。

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
总部和服务与展示中心

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
柔佛(新山)服务与展示中心

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
砂拉越(古晋)服务与展示中心

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
沙巴(亚庇)服务与展示中心

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my